

SR-RIC series



Pure Sine Wave High-frequency Inverter Charger


SR-RIC24-3KW

V1.00



Mode 1-Mains First

Mode 2-Inverter First

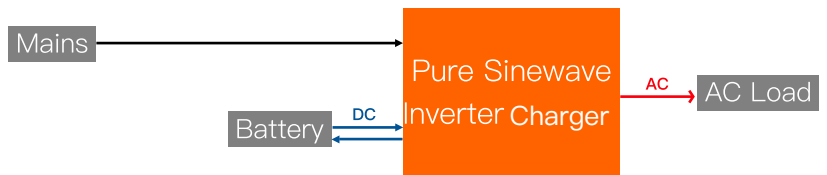

Stable

- Advanced SPWM modulation technology with pure sine wave output and high power quality.
- High power density and long life devices are selected to support long term operation at full power.

Efficiency

- High conversion efficiency, low losses and low harmonic distortion rate.


Intelligent

- Bluetooth as standard, supports mobile phone app to view device operating parameters.
- Utility bypass output, inverter output automatic uninterrupted switching power supply

Safety

- With battery over-voltage and over-discharge protection, output overload and short-circuit protection and over-temperature protection.
- Surge protection design is suitable for lithium battery power systems.
- Equipped with AC output RCD earth leakage protection switch

*there is no reverse connection protection, please do not reverse the connection

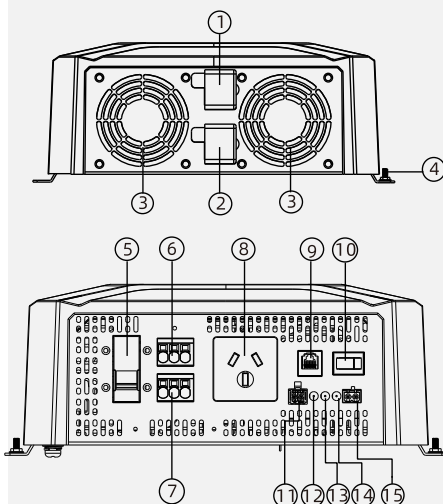

Main

Items	SR-RIC24-3KW
Inverter Output	
Rated output power	3,000W
Peak power	6,000W
Rated output voltage	220/230 (default) /240VAC (±2%)
Output Frequency	50/60Hz (±0.1%)
Output Waveform	pure sine wave
THDV	THDV<3% (resistive load)
Power Factor	1
Rated Output Efficiency	>93.5%
Max. Output Efficiency	> 95%
No-load loss	<20W
Battery	
Rated battery voltage	24VDC
Battery voltage range	21.6-31.0VDC
Rated Charging Current	100A
AC Input	
AC Input Voltage	180-265VAC (Single-Phase)
AC Input Frequency	45-65Hz
Rated Input Current	16A
General	
Dimensions	400*300*116 mm
Weight	8.7kg
Noise	≤60dB
Cooling Method	Neutral Cooling+ Intelligent Fan
Protection Degree	IP20
Ambient Temperature	-20°C~60°C
Certification	CE、ROHS、IEC62109-1/2、EN61000-6-1/3、IEC60335-1/2-29

Port

No	Port	No	Port
1	Battery positive terminal	9	RS485 port
2	Battery negative terminal	10	Work mode switch
3	Cooling fan	11	Communication interface-CAN
4	Grounding terminal	12	Inverter Indicator
5	Output AC RCD leakage protection switch	13	Charging Indicator
6	AC input port	14	Fault indicator
7	AC output port 1	15	External switch terminal
8	AC output port 2 (Australian standard; customizable to meet applicable national standards.)		

*Please read user manual for more information