



. . . .

.



EOC05B-UL 5.12kWh

Lithium Battery Energy **Storage**

PRODUCT FEATURE

- □ Supports USB interface for direct computer communication
- □ Low internal resistance design mode is adopted
- □ Supports wall, floor or rack mounting
- □ Up to 16 in parallel connection, expand to 81.92kWh
- □ High quality lithium iron phosphate cells
- □ Get started quickly and use it instantly


ABOUT SRNE

- □ SRNE 15 years in PV industry, committed to independent R&D and production.
- $\hfill\square$ Holds over 200 patents in energy storage, with unique industry-leading technologies.
- □ Chooses top-quality international components to deliver high-value products to customers.
- □ Upholds values of customer priority, proactivity, responsibility, and innovative breakthroughs.

SRNE Solar Co,.ltd. www.srnesolar.com

| MODEL | SR-EOC05B-UL |
|------------------------------|--|
| MAIN INFO | |
| Rated Voltage | 51.2V |
| Rated Capacity | 100Ah |
| Battery Energy | 5.12kWh |
| Battery Type | LFP |
| Cycling Lifespan | 6000 (80%DOD,0.2C,25°C) |
| Max. Parallel Capacity | 1~16 units |
| CHARGE&DISCHARGE | |
| Max. Charging Voltage | 57.6V |
| Over Discharging Voltage | 44.8V |
| Standard Charging Current | 50A |
| Max. Charging Current | 100A |
| Peak Charging Current | 120A (3s) |
| Standard Discharging Current | 50A |
| Max. Discharging Current | 100A |
| Peak Discharging Current | 120A (3s) |
| GENERAL | |
| Weight | 45kg (99.2lb) |
| Dimension (L*W*H) | 580*440*140mm (1.90*1.44*0.46ft) |
| Communication | CAN / RS485 / USB |
| Storage Condition | 6 months@25°C/77°F,3 months@35°C/95°F,1 month@45°C/113°F |
| Charging Temp. Range | 0~45℃ |
| Discharging Temp. Range | –10∼45℃ |
| Cooling Method | Natural cooling |
| Protection Degree | IP30 |
| STANDARD | |
| Transportation | UN38.3,MSDS |

Safety

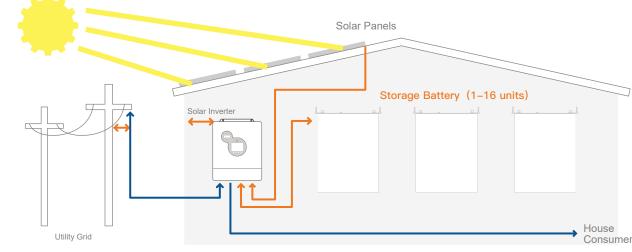

ngesthe World

Green Energy Cha



| SR- | | | |
|----------|-----|------|-----|
| <u> </u> | EUU | 055- | -01 |
| . | | | |

| 5 | 1 | .2V |
|---|---|-----|

IEC 62619: 2017, EN IEC 61000-6