




SRNE

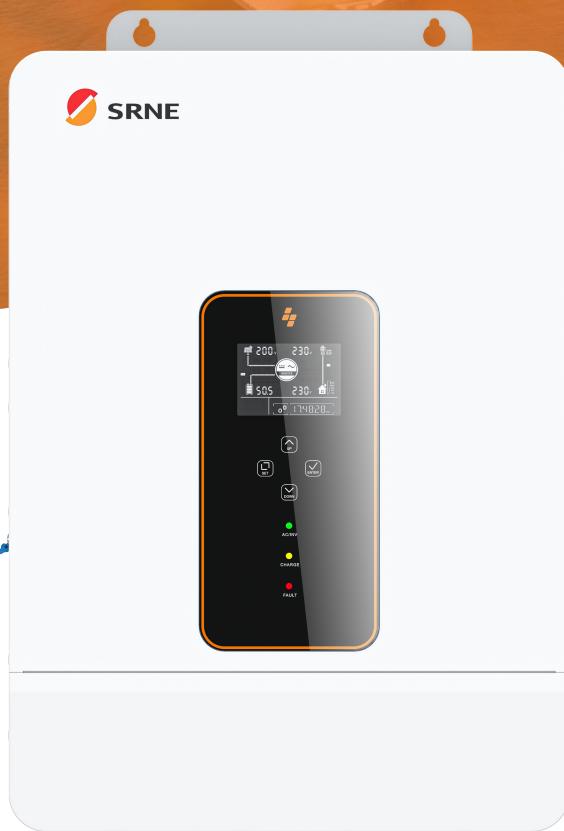

ASP 8~12kW

Three-Phase Off-Grid Solar Storage Inverter

- Supports parallel operation with power up to 72kW
- With Li-ion battery dual activation function
- Support three-phase pure sine wave output
- LCD large-screen dynamic flowchart design
- Supports 2 high efficient MPPT inputs
- Supports 4 charging modes

ABOUT SRNE

- SRNE 16 years in PV industry, committed to independent R&D and production.
- Holds over 200 patents in energy storage, with unique industry-leading technologies.
- Chooses top-quality international components to deliver high-value products to customers.
- Upholds values of customer priority, proactivity, responsibility, and innovative breakthroughs.

MODEL	ASP4880SH3	ASP48100SH3	ASP48120SH3		
AC OUTPUT					
Rated Output Power	8000W	10000W	12000W		
Max. Output Power	16000VA	20000VA	24000VA		
Phase Rated Output Power	2600W	3300W	4000W		
Rated Output Voltage	230/400Vac (three-Phase)				
Load Motor Capacity	5HP	6HP			
Rated Frequency	50/60Hz ±0.3				
Switch Time	10ms (typical)				
BATTERY					
Battery Type	Li-ion / Lead-Acid / User Defined				
Rated Battery Voltage	48V				
Battery Volatge Range	40~60Vdc				
Max. Grid/Generator Charging Current	100A	120A			
Max. Hybrid Charging Current	180A	220A	260A		
SOLAR INPUT					
No. Of MPPT	2				
Max. Input Power	6000W+6000W	7500W+7500W	9000W+9000W		
Max. Input Current	22A+22A				
Max. Open Circuit Voltage	800Vdc+800Vdc				
MPPT Voltage Range	200~650Vdc/200~650Vdc				
GRID/GENERATOR INPUT					
Input Voltage Range	Phase voltage 170~280V, Line voltage 305~485V				
Input Frequency Range	50/60Hz				
Bypass Overload Current	23.2A	29A	35A		
EFFICIENCY					
MPPT Tracking Efficiency	99.9%				
Max. Efficiency	≥92%				
European Efficiency	97.2%	97.5%			
GENERAL DATA					
Parallel Capacity	1~6 Units				
Dimension	620*445*130mm	Humidity	0~100%		
Weight	27kg	Cooling Method	air cooling		
Protection Degree	IP20	Warranty	2 years		
Temperature	-10~55°C, >45°C Derated	Communication	RS485/CAN/USB/Dry Contact		
External Module (Optional)	Wi-Fi/GPRS				
Certificate	IEC62109/EN61000/RoHS				

With PV input current / power limiting protection, PV input over-voltage, Anti-reverse charge protection at night, AC input over-voltage protection, AC input under-voltage protection, Battery over-voltage protection, Battery under-voltage protection, Battery over-current protection, AC output short-circuit protection, Heat sink over- temperature protection, inverter over-load protection, AC output reverse, Bypass over-current protection, Bypass phase inconsistency protection.